



PD985


Our latest DMR handheld radio

The new PD985 from Hytera is the latest edition to the world's most comprehensive DMR portfolio. Offering an exceptional digital experience, with a vast array of enhanced features, the PD985 is the perfect solution for improving user efficiency and safety in any industry.



Radio

PD985/PD985G DMR handheld radio

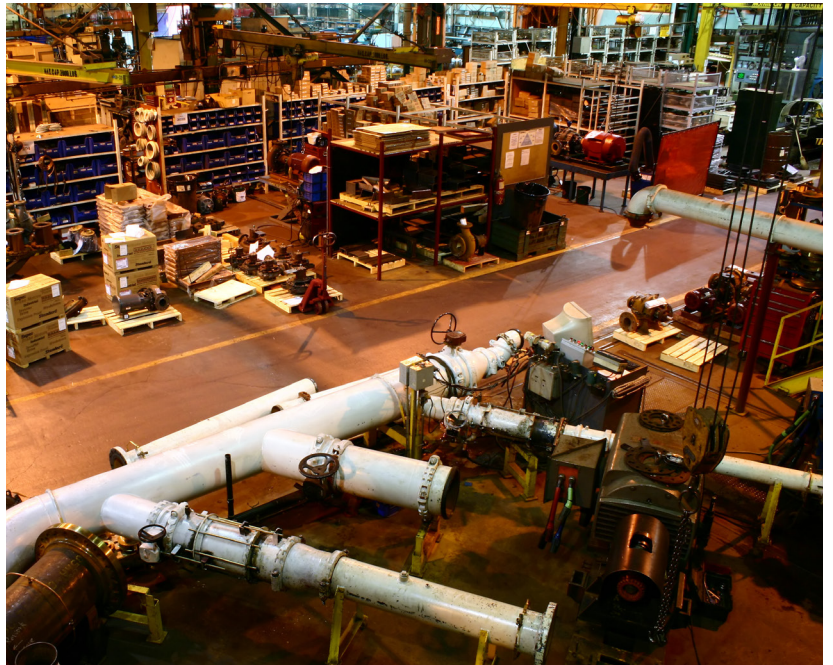

Highlights

1. Single Frequency Repeater Mode

This feature allows your device to be used, alternatively, as a repeater, enabling your communications to go further. Based on interference cancellation techniques, the PD985 uses one slot to receive a signal, and another to transmit it in the same frequency, while using DMO mode to extend the communication distance.

2. Longer Battery Life

The all new Smart Battery of the PD985 mean that this two-way radio device can be used even on long shifts, and the user is able to monitor the battery status. Consequently, the PD985 charging time is dramatically decreased.

3. Advanced Noise Cancellation Technology

Offering an exceptional audio experience, the PD985 boasts new noise cancellation technology, allowing users to hear, and speak, clearly, even in loud environments.

Advanced Features Explained:

- **Full Duplex:** PD985 enables frontline personnel to make full duplex calls between other PD985 radios, PABX, PSTN and mobile phones
- **Single Frequency Repeater Mode:** The PD985 is able to use one slot to receive a signal and another slot to transmit it on the same frequency using DMO mode to extend radio coverage.
- **Built-in Bluetooth 4.0:** With integrated Bluetooth 4.0, the PD985 not only supports audio transmit, but it will also allow programming via Bluetooth.
- **Noise Cancellation and 2.5W Audio Output:** Maximum 2.5W output speaker and new noise cancelling technology ensures clear and loud voice communication.
- **IP68 Protection:** Complies with the highest dust and waterproofing standard to confront the harshest environments The radio continues to function after submersion in fresh water down to 2 meters for up to 4 hours.
- **Smart Battery:** This feature makes it easier to monitor the battery status, such as battery life time and charging time, and will reduce the charging time.
- **Audio Recording via Micro SD card:** The PD985 supports up to a 32GB Micro SD card, to record up to 576 hours of digital / analogue audio.
- **Safety features:** Man down, lone worker and emergency mode are included as standard to protect user wellbeing.
- **Full suite of DMR Services:** including remote monitor, remote enable/disable and call alert





In the box



Belt Clip BC19



Lithium-Ion Battery (2000mAh) BL2016



RO04 - Leather Wrist Strap




MCU Rapid-Rate Charger CH10A07



Universal Standard Switching Power Adapter PS1044

Optional accessories



Remote Speaker Microphone (IP57) SM18N2



C-Earset EHN16



Swivel Earset EHN17



Battery Optimizing System MCA05



MCU Multi-unit Charger (for Thick Battery) MCA08



3-Wire Surveillance Earpiece with Transparent Acoustic Tube (Beige) EAN17

Pictures above are for reference only and may vary from actual products.

Contact your dealer for more accessories information.

Technical Data

General data		
General	Frequency Range	UHF: 350-527MHz
	Channel Capacity	1024
	Zone Capacity	64 (maximum of 128 channels per zone)
	Channel Spacing	12.5KHz / 20KHz / 25KHz
	Operating Voltage	7.4V (rated)
	Battery	2000mAh (Li-Ion)
	Battery Life (5-5-90 Duty Cycle, High TX Power) High-capacity 2000mAh Li-Ion Battery	Analogue: 14.5h Digital: 19.5h
	Frequency Stability	±0.5ppm
	Antenna Impedance	50 Ω
	Dimensions (H × W × D) (with standard battery, without antenna)	131 X 54.5 X 36mm
	Weight (with antenna & standard battery)	335
	LCD Display	160 × 128 pixels, 65535 colors 1.8 inch, 4 rows
	Receiver	Sensitivity
Digital 0.22 µV /BER5%		
Selectivity TIA-603 ETS C		60dB @ 12.5KHz / 70dB @ 20/25KHz 60dB @ 12.5KHz / 70dB @ 20/25KHz
Spurious Response Rejection TIA-603 ETSIC		70dB @ 12.5/20/25KHz 70dB @ 12.5/20/25KHz
Blocking TIA-603 ETSI		84dB
Hum and Noise		40dB @ 12.5KHz; 43dB @ 20KHz; 45dB @ 25KHz
Rated Audio Power Output		3W
Rated Audio Distortion		≤ %
Audio Response		+1 ~ -3dB
Conducted Spurious Emission		< -57dBm

Transmitter		
RF Power Output	UHF High Power: 4W UHF Low Power: 1W	
FM Modulation	11K0F3E @ 12.5KHz 14K0F3E @ 20KHz 16K0F3E @ 25KHz	
4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW	
Modulation Limiting	±2.5KHz @ 12.5KHz ±4.0KHz @ 20KHz; ±5.0KHz @ 25KHz	
FM Hum & Noise	40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz	
Adjacent Channel Power	60dB @ 12.5KHz; 70dB @ 20/25KHz	
Audio Response	+1 ~ -3dB	
Audio Distortion	≤ 3%	
Digital Vocoder Type	AMBE++or SELPor NVOC	
Digital Protocol	ETSI-TS102 361-1,-2,-3	
Environmental Specifications	Operating Temperature	-30 °C ~ +60 °C
	Storage Temperature	-40 °C ~ +85 °C
	ESD	IEC 61000-4-2 (level 4) ±8kV (contact) ±15kV (air)
	American Military Standard	MIL-STD-810 C/D/E/F/G
	Dust & Water Intrusion	IP68 Standard
	Humidity	Per MIL-STD-810 C/D/E/F/G Standard
Shock & Vibration	Per MIL-STD-810 C/D/E/F/G Standard	
GPS	Accuracy specs are for long-term tracking (95th percentile values >5 satellites visible at a nominal -130dBm signal strength)	
	TTF (Time To First Fix) Cold Start	<1 minute
	TTF (Time To First Fix) Hot Start	<10 seconds
	Horizontal Accuracy	<10 meters

Features

Base Information

- Full Keypad, Colour Screen, 1024 Channels
- Analogue and Digital Dual Mode
- Bluetooth (4.0) Audio (PD985G)
- Bluetooth (4.0) Data*(PD985G)
- Integrated GPS (PD985G)
- Integrated GLONASS (PD985G)
- Pre-programmed Text Messaging
- Freeform Text Messaging
- Option Board
- Roaming
- Scan
- Channel Change Voice Notification

Audio

- Auto Gain Control
- Acoustic Feedback Suppressor
- Loudness Quality Optimization
- Multi Band Equalization*
- Noise Cancellation Technology

NOTES

* Features will be available from Q2 2017

- Standard feature
- Optional feature

Safety

- Emergency Alarm
- Dedicated Emergency Button
- Alert Call
- Man Down
- Lone Worker
- Basic Encryption
- Enhanced Encryption(40bit)
- Enhanced Encryption(128/256bit)
- Multiple Key Encryption
- Priority Interrupt
- Remote Monitor
- Radio Enable/Disable
- Radio Check
- IP68 Dust and Waterproof
- Vibrate Alert
- GPS SMS (PD985G)
- GPS Location check (PD985G)

Systems

- Analogue Conventional
- DMR Conventional
- IP Site Connect
- MPT-1327
- DMR Simulcast System
- XPT Trunking
- DMR Trunking

Advanced Features

- Pseudo Trunk
- Telemetry
- Rent
- Phone Interconnect
- Full Duplex Call (DMR Tier 3 System)
- Full Duplex Call (DMR Conventional System)
- Single Frequency Repeater Mode
- Audio Recording Capability via Micro SD Storage Card
- Smart Battery
- RTC Clock

PD985 Highlight

Hardware Advantages




Better Sensitivity and Frequency Stability

Advanced technology improves receiving performance to enhance communication distance and reliability.



Longer Battery Life

PD985 adopts new battery saving technology to guarantee longer communication time.

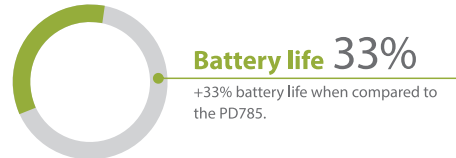

IP68 Protection

IP68 Dust and Waterproof Standards ensures outstanding performance, even in harsh environments.



360 Degree Stepless Channel Knob

New control to change channels and zones easily and comfortably.



Enhanced Voice Quality

Maximum 3W output speaker and new noise cancelling technology ensures clear and loud voice communication.

Your Hytera partner:



Hytera Communications Corporation Limited

Address: Hytera Communications (UK) Co. Ltd.
Hytera House, 939 Yeovil Road, Slough, Berkshire. SL1 4NH, UK.
Tel: +44 (0) 1753 826 120 **Fax:** +44 (0) 1753 826 121
www.hytera.co.uk **info@hyterauk.co.uk**

Further information can be found at:

www.hytera.co.uk

Keep up to date with Hytera on social media.



Hytera reserves the right to modify the product design and the specifications. In case of a printing error, Hytera does not accept any liability. All specifications are subject to change without notice.

Encryption features are optional and have to be configured separately. They are also subject to European export regulations.

HYT Hytera™ are registered trademarks of Hytera Communications Corp. Ltd. © 2017 Hytera Communication Corp., Ltd. All rights reserved.